PB82-238619

Verification and Transfer of Thermal Pollution Model. Volume VI: User's Manual for One-Dimensional Numerical Model

Miami Univ.
Coral Gables, FL

Prepared for

National Aeronautics and Space Administration
Cocoa Beach, FL

May 82

U.S. Department of Commerce
National Technical Information Service
NTIS

PB82-238619

United States
Environmental Protection
Agency

EPA-600/7-82-037f
May 1982

EPA

Research and Development

VERIFICATION AND TRANSFER OF THERMAL POLLUTION MODEL

Volume VI. User's Manual for
One-dimensional Numerical Model

Prepared for

Office of Water and Waste Management
EPA Regions 1-10

Prepared by

Industrial Environmental Research
Laboratory
Research Triangle Park NC 27711

REPRODUCED BY
NATIONAL TECHNICAL
INFORMATION SERVICE
U.S. DEPARTMENT OF COMMERCE
SPRINGFIELD, VA 22161

TECHNICAL REPORT DATA
(Please read Instructions on the reverse before completing)

1 REPORT NO. EPA-600/7-82-037f	3. RECIPIENT'S ACCESSION NO. PB82-238619
4 TITLE AND SUBTITLE Verification and Transfer of Thermal Pollution Model; Volume VI. User's Manual for One-dimensional Numerical Model	5 REPORT DATE May 1982 6. PERFORMING ORGANIZATION CODE
7. AUTHOR(S) S.S.Lee, S.Sengupta, and E.V.Nwadike	8 PERFORMING ORGANIZATION REPORT NO.
9 PERFORMING ORGANIZATION NAME AND ADDRESS The University of Miami Department of Mechanical Engineering P.O. Box 248294 Coral Gables, Florida 33124	10. PROGRAM ELEMENT NO. 11. CONTRACT/GRANT NO. EPA IAG-78-DX-0166*
12 SPONSORING AGENCY NAME AND ADDRESS **EPA, Office of Research and Development** **Industrial Environmental Research Laboratory** **Research Triangle Park, NC 27711**	13. TYPE OF REPORT AND PERIOD COVERED Final; 3/78-9/80 14. SPONSORING AGENCY CODE **EPA/600/13**

15 SUPPLEMENTARY NOTES IERL-RTP project officer is Theodore G.Brna, Mail Drop 61, 919/541-2683. (*) IAG with NASA, Kennedy Space Center, FL 32899, subcontracted to U. of Miami under NASA Contract NAS 10-9410.

16. ABSTRACT The six-volume report: describes the theory of a three-dimensional (3-D) mathematical thermal discharge model and a related one-dimensional (1-D) model, includes model verification at two sites, and provides a separate user's manual for each model. The 3-D model has two forms: free surface and rigid lid. The former, verified at Anclote Anchorage (FL), allows a free air/water interface and is suited for significant surface wave heights compared to mean water depth; e.g., estuaries and coastal regions. The latter, verified at Lake Keowee (SC), is suited for small surface wave heights compared to depth (e.g., natural or man-made inland lakes) because surface elevation has been removed as a parameter. These models allow computation of time-dependent velocity and temperature fields for given initial conditions and time-varying boundary conditions. The free-surface model also provides surface height variations with time. The 1-D model is considerably more economical to run but does not provide the detailed prediction of thermal plume behavior of the 3-D models. The 1-D model assumes horizontal homogeneity, but includes area-change and several surface-mechanism effects.

17. KEY WORDS AND DOCUMENT ANALYSIS

a. DESCRIPTORS	b. IDENTIFIERS/OPEN ENDED TERMS	c. COSATI Field Group
Pollution	Pollution Control	13B
Thermal Diffusivity	Stationary Sources	20M
Mathematical Models		12A
Estuaries		08H,08J
Lakes		
Plumes		21B

18 DISTRIBUTION STATEMENT **Release to Public**	19 SECURITY CLASS (This Report) **Unclassified**	21 NO. OF PAGES 58
	20 SECURITY CLASS (This page) **Unclassified**	22 PRICE

EPA Form 2220-1 (9-73)

EPA-600/7-82-037f

May 1982

VERIFICATION AND TRANSFER OF THERMAL POLLUTION MODEL

VOLUME VI: USER'S MANUAL FOR ONE-DIMENSIONAL NUMERICAL MODEL

By

Samuel S. Lee, Subrata Sengupta
and Emmanuel V. Nwadike
Department of Mechanical Engineering
University of Miami
Coral Gables, Florida 33124

NASA Contract No. NAS 10-9410

NASA Project Manager: Roy A. Bland

National Aeronautics and Space Administration
Kennedy Space Center
Kennedy Space Center, Florida 32899

EPA Interagency Agreement No. 78-DX-0166

EPA Project Officer: Theodore G. Brna

Industrial Environmental Research Laboratory
Office of Environmental Engineering and Technology
Research Triangle Park, North Carolina 27711

Prepared for:

U. S. Environmental Protection Agency
Office of Research and Development
Washington, D. C. 20460

PREFACE

Emphasis continues to be placed on the use of digital computers in solving nonlinear hydrodynamic and thermodynamic equations of fluid flow. This publication of the thermal pollution group at the University of Miami presents the solution of one such problem. This problem deals with the use of a numerical one-dimensional model in predicting the temperature profiles of a deep body of water. Although this model can be applied to most lakes, a specific site (Lake Keowee, S. C.) application has been chosen and described in detail. The programs are written in fortran V and could be modified by the user. Some of these modifications are suggested either in the text or in the specific programs.

A detailed derivation of the equations integrated has been left out; however, to improve readability of the final equations, the meaning of the terms and variables occurring in these equations are included.

This research was performed at the thermal pollution laboratory at the University of Miami. Funding was provided by the National Aeronautics and Space Administration (NASA-KSC) and the Environmental Protection Agency (EPA-RTP).

ABSTRACT

A user's manual for a one-dimensional thermal model is described. The model is essentially a set of partial differential equations which are solved by finite difference methods using a high speed digital computer. The main equations integrated are discussed. The programs are written in fortran V and an example problem is discussed in detail.

CONTENTS

Forward .....
Preface ii
Abstract iii
Figures v
Symbols vi
Acknowledgments vii

1. Introduction 1
2. Recommendations 3
3. Program Description and Flow Chart 4
   Description of program algorithm 4
   Background 4
   Algorithm 4
   Main program and subroutines 6
4. Description of Program Symbols 9
   Introduction 9
   Description of main variables 10
5. Preparation of Input Data 12
6. Plotting Programs and Execution Elements 13
   Plotting programs 13
   Input data 13

References 17
Appendices 18

A. Example Problem 18
   Site description 18
   Problem statement 18
   Calculations of parameters and input data 18
B. Fortran Program Listings 27

FIGURES

Number		Page
1	Idealized deep body of water	5
2	Flow chart (calculation)	7
3	Flow chart (plots)	16
4	Lake Keowee	20
5	Sample output - Lake Keowee, 1971	24
6	Sample plots - measured average temperature profiles (Stations 500-506) vs predicted temperature profiles, Lake Keowee, 1971	25
7	Sample plot	26

SYMBOLS

z	Vertical coordinate measured upward from deepest point of the lake. As a subscript it marks the vertical components of a vector.
h	Depth of lake
$A(z)$	Horizontal cross-sectional area at height Z
$I(z)$	Bottom-surface source of mass per unit area
$Q(z)$	Bottom-surface source of heat per unit area
T	Temperature (°C)
ρ	Density of water
V_z	Vertical velocity
K_z	Eddy diffusivity
K_{zo}	Eddy diffusivity under neutral condition
$W^* = (\tau_s/\rho)$	Friction velocity
σ_1	Empirical constant
R_i	Richardson number
α_v	Volumetric coefficient of expansion of water
τ_s	Surface shear stress
C_p	Heat capacity
$H(z)$	Heat source/unit volume
A_1	Average value of W^*
B_1	Half of the annual variation W^*
C_1, C_2, C_3, C_4, C_5	Phase angles
ϕ_o	Solar radiation incident on the water surface
A_2	Average value of ϕ_o
B_2	Half the annual variation of ϕ_o
η	Extinction coefficient
β	Absorption coefficient
Q_D	Volumetric discharge
ΔT	Condenser temperature change
T_D	Discharge temperature
q_s	Surface heat flux
K_s	Surface heat exchange coefficient
T_E	Equilibrium temperature
A_3	Average value of T_E
B_3	Half the annual variation of T_E
T_s	Surface temperature
q_B	Bottom surface heat flux
B	Lake surface radius
$\frac{dA}{dz}$	Area variation with depth

ACKNOWLEDGMENTS

This work was supported by a contract from the National Aeronautics and Space Administration (NASA-KSC) and the Environmental Protection Agency (EPA-RTP).

The authors express their sincere gratitude for the technical and managerial support of Mr. Roy A. Bland, the NASA-KSC project manager of this contract, and the NASA-KSC remote sensing group. Special thanks are also due to Dr. Theodore G. Brna, the EPA-RTP project manager, for his guidance and support of the experiments, and to Mr. S. B. Hager, Chief Engineer, Civil-Environmental Division, and Mr. William J. McCabe, Assistant Design Engineer, both from the Duke Power Company, Charlotte, North Carolina, and their data collection group for data acquisition. The support of Mr. Charles H. Kaplan of EPA was extremely helpful in the planning and reviewing of this project.

SECTION 1

INTRODUCTION

It is important that the thermal behavior of heated discharges and their receiving basins be clearly understood.

A numerical model that can be used for predicting the seasonal thermocline of a deep body of water is very useful in studying the environmental impact of thermal discharges from power plants. This is not only required for existing power plants but also for planned units. Thus, a predictive capability is essential to the licensing procedure. Monitoring programs cannot satisfy these needs, but from time to time, play a vital role in the calibration and verification of mathematical models.

The one-dimensional, thermal numerical model, described in this manual, features the effects of area change with depth, nonlinear interaction of wind-generated turbulence and buoyancy, absorption of radiative heat flux below the surface, thermal discharges and the effects of vertical convection caused by discharge. The main assumption in the formulation of this model is horizontal homogeneity.

This model can be applied to most stratified deep bodies of water. This stratification has a seasonal cycle and is an important natural characteristic of a body of water. The body of water could be divided into any number of slices. The temperature of each slice is predicted by the model. The surface slice exchanges heat with the environment of known climatic conditions while the bottom slice is assumed perfectly insulated. Condenser cooling water is extracted from any one of the slices and heated by the power plant. The discharge is injected into a slice of the same temperature as the dischage.

The main function of the model is the prediction of the temperature profiles in a deep body of water for any number of annual cycles. However, predictions connot be made on hourly basis - a feature usually handled by a more sensitive three-dimensional model. This is the main limitation of the model.

The procedure used in writing this manual is as follows:

Description and flow chart of the main program are given in Section 3, where the subroutines are also described. In the next section, a list of the variables and dimensions are given. The next three sections

show how a typical run is prepared, executed and plotted. An example case is discussed in Appendix A, while Appendix B gives the fortran source program listings.

SECTION 2

RECOMMENDATIONS

The main disadvantage of a one-dimensional thermal model lies in the fact that resolution is sacrificed for computational speed. Three dimensional models are bulky and time consuming but have much better resolution, however, when long term simulations are necessary, a one-dimensional model is recommended.

The model described here can be modified to include the single effects of the various quantities involved in the surface heat transfer phenomenon rather than using the equilibrium temperature concept. This is particularly recommended for the user who is interested in modeling the long term effects of one (for example, evaporation) of the quantities involved in the surface heat transfer processes.

Furthermore, the model can be easily adapted to handle connected multiple domains. This recommendation is discussed in the text.

SECTION 3

PROGRAM DESCRIPTION AND FLOW CHART

DESCRIPTION OF PROGRAM ALGORITHM

Background

A view of an idealized deep body of water is shown in Figure 1. This basin is divided into eleven slices. The inner nine slices are of equal thickness, DZ, while the top and bottom slices are of thickness DZ/2. The thickness, DZ, is determined from the depth of the basin and the number of slices used. The temperature of each slice is as shown in Figure 1; the horizontal lines correspond to the center of each slice.

The condenser cooling water (CCW), if any, could be taken from any slice. In Figure 1, the CCW is extracted from the center of Slice 2 which is at temperature T_2. The discharge temperature, T_D, is the sum of T_2 and the increase in temperature through the condenser. T_D is injected into a slice of equal temperature or treated as a surface outfall if T_D is greater than the highest temperature of the basin.

The basin also gains or loses heat from the surface as a result of changing climatic conditions which are required as input data. These could vary every time step, daily or monthly.

Algorithm

The problem is an initial value problem, so the values of dependent variables are assumed known initially. The governing and associated equations are discussed in the next section. The governing equation is parabolic and mathematically represents a diffusion process with vertical convection.

The values of the dependent variables at successive time steps are obtained by using a forward-time Dufort-Frankel scheme.

The sequence in which calculations are performed is as follows: (Refer to Summary of Variables - next section.)

1. The dependent variables, T, K_Z, W*, A_V, ρ, T_E and K_S, are initialized. The area of each slice is calculated and then the time step

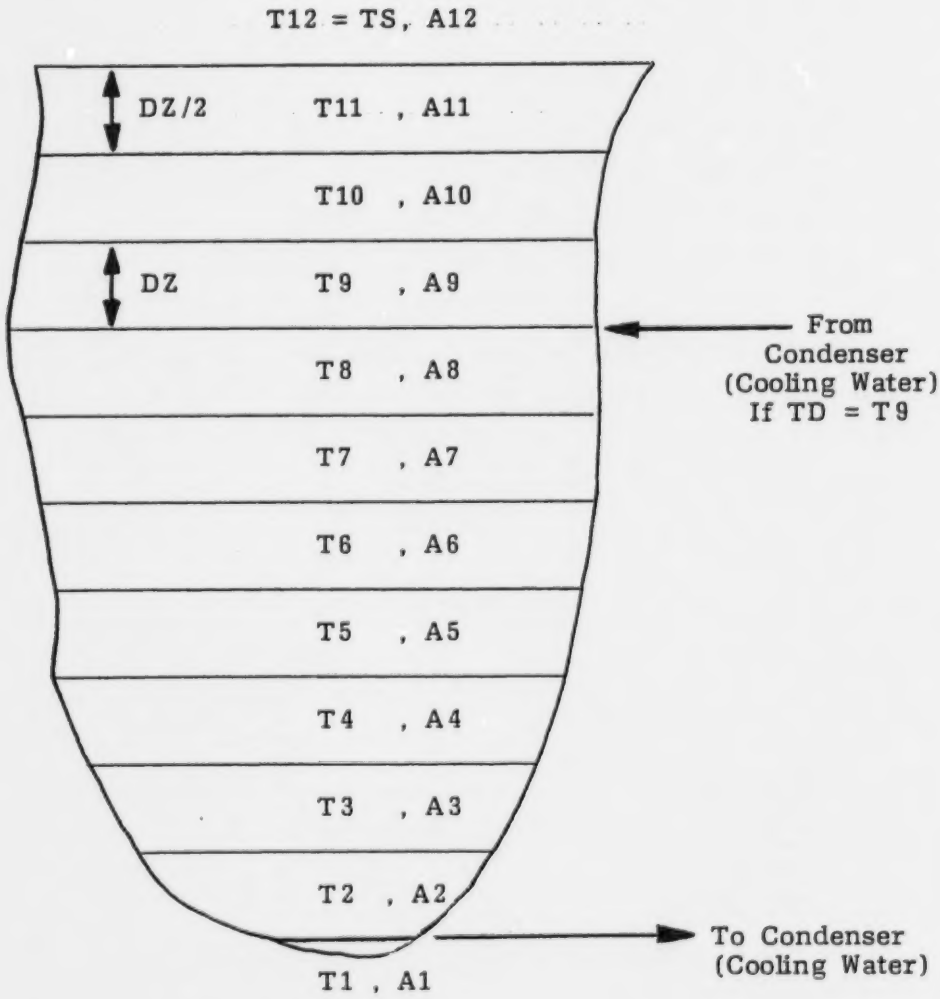

Figure 1. Idealized deep body of water

is calculated. The heading of the beginning year is printed. The values of the variables, K_Z, W*, A_V, ρ, T_E and K_S, are then calculated. The temperatures of the slices are finally calculated. If the temperature profile is unstable, mixing of the unstable portion of the profile is undertaken.

2. During the next time step, the temperatures are updated, and the dependent variables are calculated again.

3. The values of the temperature T, eddy diffusivity K_Z, number of days and surface heat transfer coefficient K_S are printed every time step, every day or normally at the end of each month. At the end of the present year, the title of the new year is printed and computions continue as listed above. These steps are shown in a flow chart, Figure 2. The results are stored on a magnetic tape and plotted when necessary.

Description of Main and Subprograms

The fortran calculation programs consist of a main program (NASA) and seven subroutines (YEARS, EQUIL1, STORE, CCW, SMOOTH, MIXIT and AREAS).

1. MAIN: The main program handles the input data, calls the subroutines and does the temperature calculations. Two alternatives are given for handling the input data; these are either read through cards or in-data files or through a block-data arrangement given at the beginning of the main program. For users interested in the block-data package, the following caution is necessary: Whenever a data or set of data is changed, the main program must be recompiled!

2. YEARS: This subroutine prints the year heading. It is called at the beginning of a new year.

3. EQUIL1: This subroutine reads the dewpoint temperature, wind speed and solar radiation. It then computes the surface heat transfer coefficient and the equilibrium temperature. Depending on how the data has been averaged (e.g. days, months or years); it is called as often as needed.

4. STORE: This subroutine stores the calculated data on magnetic tape designated as Unit 8. The stored data could be read by the plotting subroutine called READER. This subroutine and other plot programs are described later.

5. CCW: This subroutine supplies the condenser cooling water data. The data is also converted to the required units by this subroutine.

6. SMOOTH: This subroutine finds the largest value of the eddy dif-

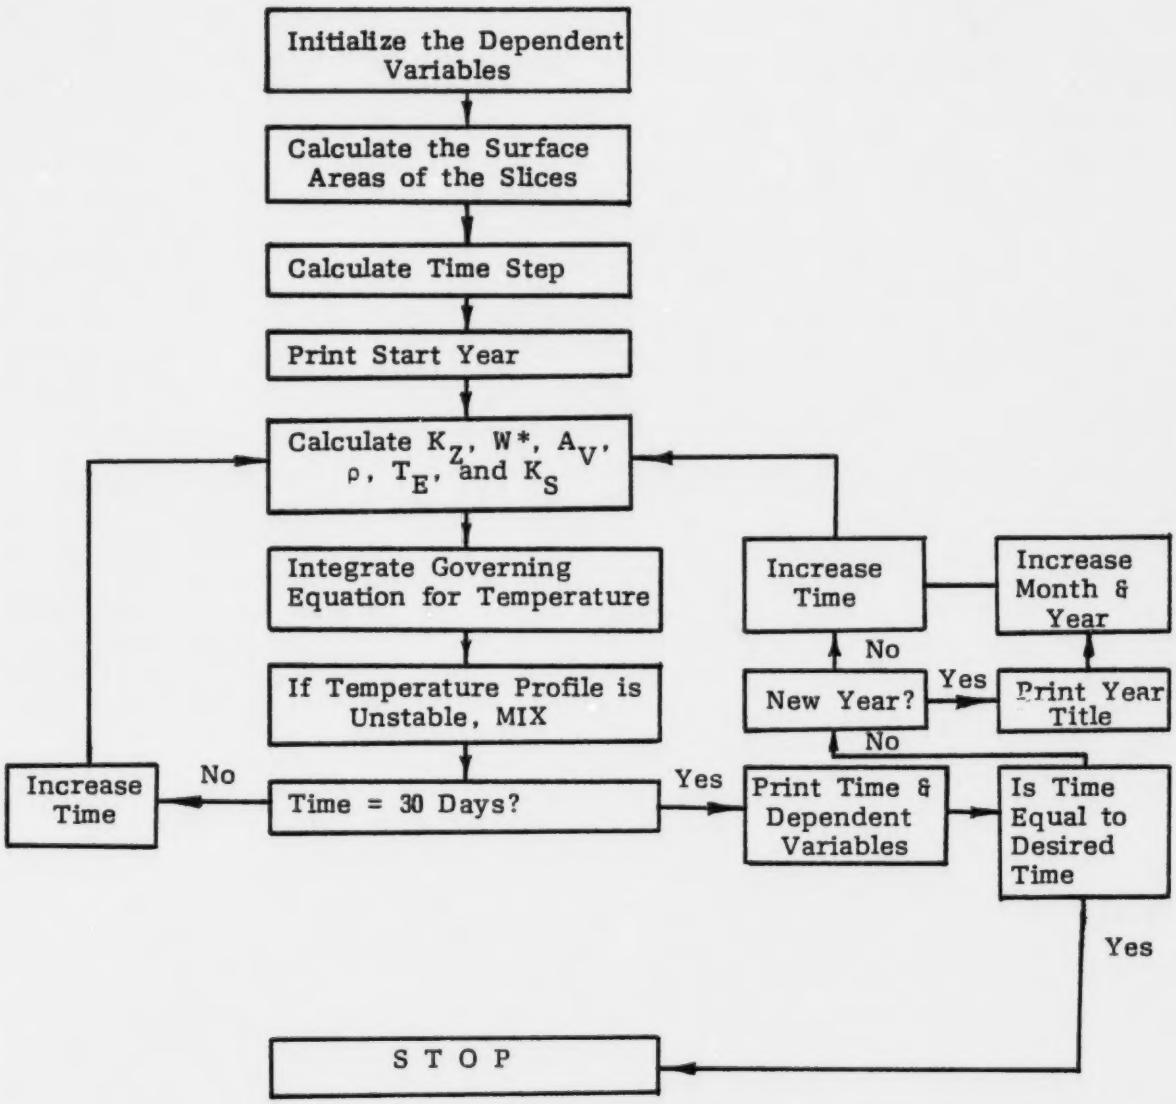

Figure 2. Flow chart (calculation)

fusivity and uses it to calculate the variable time step. It also smoothens the calculated eddy diffusivity for unstable temperature gradients. It is called every time step.

7. MIXIT: This subroutine looks for unstable temperature gradients and mixes or stabilizes the temperatures. It is also called every time step.

8. AREAS: This subroutine handles the surface areas of each slice and converts the values to the required units. It is called only once at the beginning of the computations.

9. INPUT: This is an in-data element containing all input data.

SECTION 4

DESCRIPTION OF PROGRAM SYMBOLS

Introduction

The programs have been written to calculate, as a function of depth, thermal diffusivity and temperature profiles over complete annual cycles. The equation integrated is

$$A_{(Z)}\frac{\partial}{\partial t}(\rho C_p T) = \frac{\partial}{\partial Z}(\rho C_p A_{(Z)} K_Z \frac{\partial T}{\partial Z}) - \frac{\partial}{\partial Z}(\rho C_p A_{(Z)} T V_Z) + QA' + A_{(Z)} H_{(Z)} \quad (1)$$

The above equation requires two boundary conditions and one ititial condition.

The initial condition is an input quantity supplied by the user and equals the homothermal temperature of the basin. The boundary conditions are:

1. At the surface;

$$K_Z \frac{\partial T}{\partial Z}\Big|_{Z=h} = K_S (T_E - T_S) \quad (2)$$

where Z = vertical coordinate measured from the deepest point
T_E = equilibrium temperature
T_S = surface temperature
K_S = surface heat exchange coefficient

2. At the bottom;

Perfect insulation is assumed,

$$\frac{\partial T}{\partial Z}\Big|_{Z=0} = 0 \quad (3)$$

Calculations of the temperature profiles are made by numerical integration of Equation (1). Calculations start with the homothermal conditions and a forward explicit scheme is used.

Each time step, the surface temperature, T_S = T12, is calculated

and then the temperature of each slice is calculated. Solar radiation is absorbed at the surface slice and the unabsorbed portion is transmitted exponentially to the slices below.

The empirical relations involved in this manual are summarized below. A full discussion is given in the final report, Lee et al. (1980).

Description of Main Variables

1. Density, ρ, fortran variable - ROW:

$$\rho = A_1 + B_1 T + C_1 T^2 \tag{4}$$

where A_1 = density at 0°C
= 1.02943 gm/cc
B_1 = constant
= -0.00002
C_1 = constant
= -0.0000048

2. Eddy diffusivity, K_Z, fortran variable = XKZ

$$K_Z = K_{ZO}(1 + \sigma_1 R_i)^{-1} \tag{5}$$

and

$$R_i = \frac{\alpha_V g_Z^2}{W^{*2}} \frac{\partial T}{\partial Z} \tag{6}$$

where R_i = Richardson number
σ_1 = 0.1, an empirical constant, fortran variable - SIGMA
g = acceleration due to gravity, fortran variable - G
W^* = friction velocity, fortran variable - FRVEL
= (τ_s/ρ)

$$\alpha_V = A_2 + B_2(T - 4) + C_2(T - 4)^2 \tag{6a}$$

fortran variable for α_V, AV

where A_2 = 0, volumetric coefficient of expansion at 4°C, fortran variable - A1
B_2 = constant, fortran variable - A2
= 1.538×10^{-5}
C_2 = constant, fortran variable - A3
= -2.037×10^{-7}

α_V can also be estimated by using Equation (4).

where K_{ZO} = eddy diffusivity under neutral condition (varies with time), fortran variable - XKZO

$$K_{ZO} = A_3 + B_3 \sin(\frac{2\pi}{365}t + C_3) \quad \text{(t is in days)} \tag{6b}$$

where A_3 = average value of K_{ZO}, fortran variable - R9
B_3 = half annual variation of K_{ZO}, fortran variable - R10
C_3 = phase angle, fortran variable - R8

3. Heat source, H, fortran variable - F6

$$H = \eta(1 - \beta)A_{(Z)}\phi_o \exp(-\eta(Z - h)) \tag{7}$$

where β = 0.5, fraction of the solar radiation absorbed at the surface
η = 0.75, solar radiation absorption coefficient
ϕ_o = net solar radiation reaching the water surface (input variable), fortran variable - HSOL

SECTION 5

PREPARATION OF INPUT DATA

The input data is stored in an in-data file - INPUT. Alternatively, it could be punched on cards. The input data is read in with an open format. The main variables read are: dewpoint temperature, wind speed and solar radiation. In some cases where the dewpoint temperature is not available, the relative humidity, air temperature and a pschometric chart are used to find the dewpoint temperature. If this involves a lot of chart reading, subroutine EQUIL1 could be modified and the dewpoint temperature calculated from a known equation supplied by the user. If the latter case is used, then the input data base is enlarged to read air temperature, relative humidity, wind speed and solar radiation. A detailed input list of the constants is given in Appendix A.

SECTION 6

PLOTTING PROGRAMS AND EXECUTION ELEMENTS

DESCRIPTION OF PROGRAMS

The fortran plotting routine consists of one main program (PLOTTER) and one subroutine (READER).

PLOTTER: This program calls the calcomp fortran subroutines (refer to a Calcomp plotting manual for details) and the subroutine (READER) which reads the calculated results from a magnetic tape designated as Unit 8. (See Item A.4.) A flow chart is shown in Figure 3.

READER: Reads the calculated data stored on Unit 8 (magnetic tape).

Execution Elements

Two execution elements are used, one for executing the calculated results and the other for executing the plots.

DO-IT: This element compiles and prints the main program (NASA) and then prepares an entry point table, maps the necessary programs and subprograms, calls the in-data element containing the input data and finally, executes the calculations. This is done as follows for a UNIVAC 1100 computer at the University of Miami.

Only one magnetic tape is necessary.

1. @ ASG, AX FILE.

   The 'FILE' is assigned for the run.

2. @ ASG, T 8., 16N, TAPENAME

   A magnetic tape file named '8.' is being assigned. The tape is 9-track, and the reel number is 'TAPENAME'. The calculated results are stored on this tape.

3. @ PRT, S FILE.NASA

   The main program is printed.

4. @ PACK FILE.

   The 'FILE' is packed.

5. @ PREP FILE.

   The entry point table is prepared.

6. @ MAP, S

7. IN FILE.NASA

8. LIB FILE.

9. END

10. @ XQT

11. @ ADD FILE.INPUT

12. @ FIN

PLOT-IT: Similar to DO-IT, but handles the plotting executions. For a UNIVAC 1100 computer the following cards are necessary. Two magnetic tapes are necessary.

1. @ ASG, AX FILE.

2. @ ASG, T 8., 16N, TAPENAME

3. @ ASG, T 11., 16, PLOTTAPE

   A magnetic tape file named '11.' is being assigned. The tape is 7-track, and the reel number is 'PLOTTAPE'. The plots are stored on this tape.

4. @ PRT, S FILE.PLOTTER

   The plot program is printed.

5. @ PACK FILE.

6. @ PREP FILE.

7. @ MAP, S

8. IN FILE.PLOTTER

9. LIB FILE.

10. END

```
11.  @ XQT
12.  @ ADD FILE.INPUT
13.  @ FIN
```

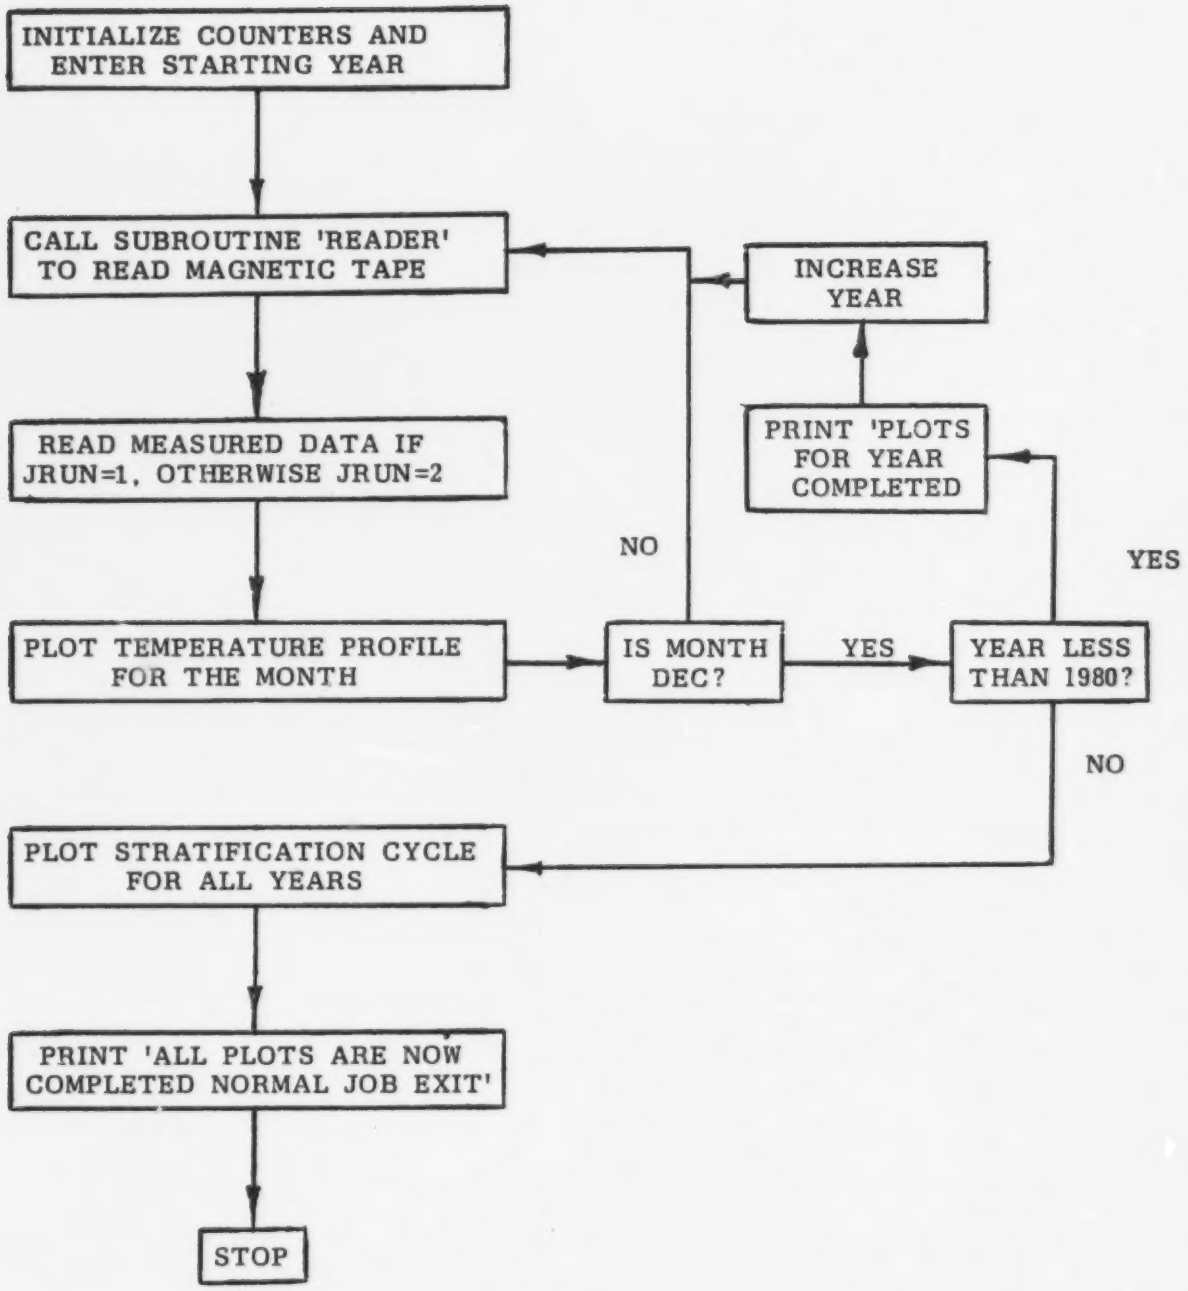
INITIALIZE COUNTERS AND ENTER STARTING YEAR
CALL SUBROUTINE 'READER' TO READ MAGNETIC TAPE
READ MEASURED DATA IF JRUN=1, OTHERWISE JRUN=2
PLOT TEMPERATURE PROFILE FOR THE MONTH
IS MONTH DEC?
NO
YES
INCREASE YEAR
PRINT 'PLOTS FOR YEAR COMPLETED
YEAR LESS THAN 1980?
YES
NO
PLOT STRATIFICATION CYCLE FOR ALL YEARS
PRINT 'ALL PLOTS ARE NOW COMPLETED NORMAL JOB EXIT'
STOP

Figure 3. Flow chart (plots)

REFERENCES

Duke Power Company. Oconee Nuclear Station Environmental Summary Report 1971-1976. Vol. 1. November 1977.

Sengupta S., Lee S. S. and E. V. Nwadike. A One-Dimensional Variable Cross-Section Model for the Seasonal Thermocline. Proceedings of the Second Conference on Waste Heat Management and Utilization. p. 1X-A-3. December 1978.

Lee, S. S., Sengupta, S. and E. V. Nwadike. Verification of a One-Dimensional Model for the Seasonal Thermocline at Lake Keowee. NASA Contract NAS 10-9410. 1980.

APPENDIX A

APPENDIX A

EXAMPLE PROBLEM

The model described in this manual was verified using monthly-averaged data supplied by Duke Power Company for Lake Keowee, South Carolina. Accordingly, the data discussed below apply to Lake Keowee.

SITE DESCRIPTION

Lake Keowee is located 40 km west of Greenville, South Carolina. It is the source of cooling water for Oconee Nuclear Station (ONS). It was formed from 1968 through 1971 by damming the Little and Keowee rivers. A connecting canal (maximum depth 30.5 m) joins the two main arms of the lake. Flow out of the lake is through the Keowee Hydro Station. Lake Keowee also exchanges water with Lake Jocassee-pumped storage station. The three-unit ONS with a net capacity of 2580 Mwe started operating in July 1973. ONS operated on annual gross thermal capacity factors of 11, 28, 69 and 59% in the years 1973 through 1976, respectively. From 1977 to 1979 the factors varied from 65 to 75%. A map showing the geometry of the lake is given in Figure 4.

PROBLEM STATEMENT

Calculation of Parameters and Input Data

1. The fortran variable DM(I, J) is a two-dimensional array containing the temperatures at the connecting channel between Lake Keowee and the Jocassee-pumped storage station. The data is averaged monthly. The units are in degrees Celcius (°C). I is the year counter and J is the month counter. The inputs for the first year are punched on the first card, the next year on the next card, and so on. Accordingly, each card contains twelve inputs in open format (real floating point numbers).

2. The following fortran variables/constants are also read in with open format, five on one card.

   IYEAR: starting year - 1971 (could be changed).

   DZ: thickness of an inner slice (ft) - (maximum depth of lake)/(10.0).

   XKZL: lower limit of the eddy diffusivity (ft^2/day) - corresponds to

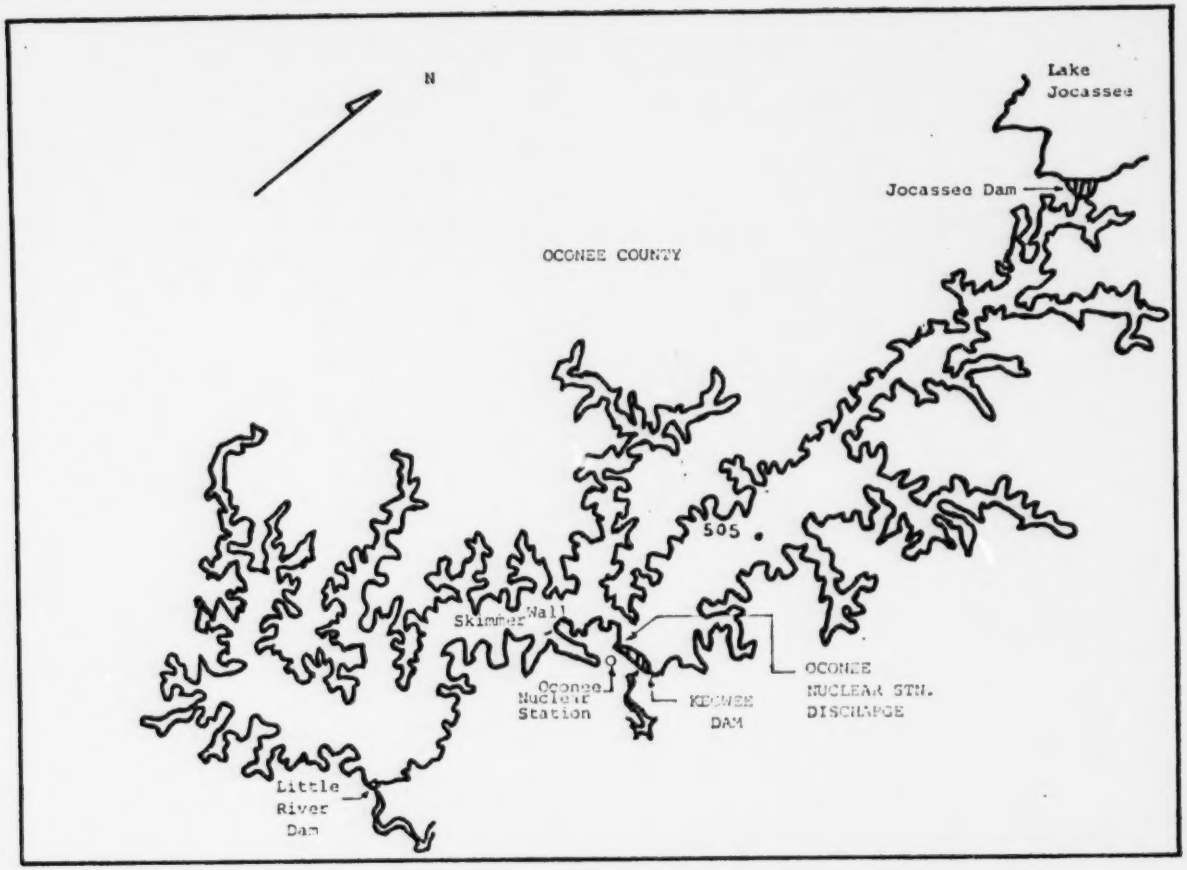

Figure 4. Lake Keowee

the thermal diffusivity of solid water (15 ft^2/day).

H: maximum depth of lake, ft (150 ft).

G: acceleration due to gravity (ft/sec^2).

PI: $\pi = 3.1415926$.

A1: corresponds to A2 in Equation (6a); A1 = 0 $°C^{-1}$.

A2: corresponds to B2 in Equation (6a); A2 = 1.538×10^{-5} °C.

A3: corresponds to C2 in Equation (6a); A3 = -2.037×10^{-7} °C.

A4: corresponds to A1 in Equation (4); A4 = 1.02943 gm/cc °C.

A5: corresponds to B1 in Equation (4); A5 = 0.00002 gm/cc °C.

A6: corresponds to C1 in Equation (4); A6 = -0.0000048 gm/cc $°C^2$.

(NOTE: The units for A4 through A6 are automatically converted to consistent units in the main program.)

TO: homothermal temperature of lake (initial condition); TO = 7.8 °C.

C_p: specific heat; C_p = 1.8 BTU/lb °C.

SIGMA: see Equation (5); SIGMA = σ_1 = 0.1.

**R6,R7,R8: the friction velocities (τ_s/ρ) are calculated for the whole period and fitted into a sine curve: (friction velocity OMEGA)

$$W^* = R6 + R7 \sin\left(\frac{2\pi}{365}\text{time} + R8\right)$$

where R6 = average value of W*, 0.1 ft/sec.
R7 = average value of the half annual variations of W*, 0.025 ft/sec.
R8 = phase angle, 2.61 radians
TIME is in days, not specified.

R8,R9,R10: correspond to C3, A3, and B3 of Equation (6b) respectively; R9 = 800 ft^2/day and R10 = 200 ft^2/day.

DATA1: 0 or 1 (see below).

3. The next set of inputs is the dewpoint temperatures, wind speed and

---

**Alternatively, friction velocity could be read in as monthly averages. If this alternative is followed, then DATA1 = 1, otherwise DATA1 = 0.

solar radiation. These can either be punched on cards or stored in an in-data element. They are read every month. Each card contains three members. For example: for January-March 1971 (Lake Keowee), the data are

3.0, 6.69, 167.0

0., 9.3, 264.4

6.3, 9.28, 264.4

The first number on each line (each card) is the dewpoint temperature in °C. The second one is the wind speed in ft/sec. The third quantity is the solar radiation in BTU/ft²day. If DATA1 = 1, a fourth number must be included on each line (every card). This fourth quantity is the computed friction velocity for each month.

NOTE: The in-data element described above is called INPUT. (See Fortran Source Program Listing, Appendix B.)

Sample Output and Sample Plots

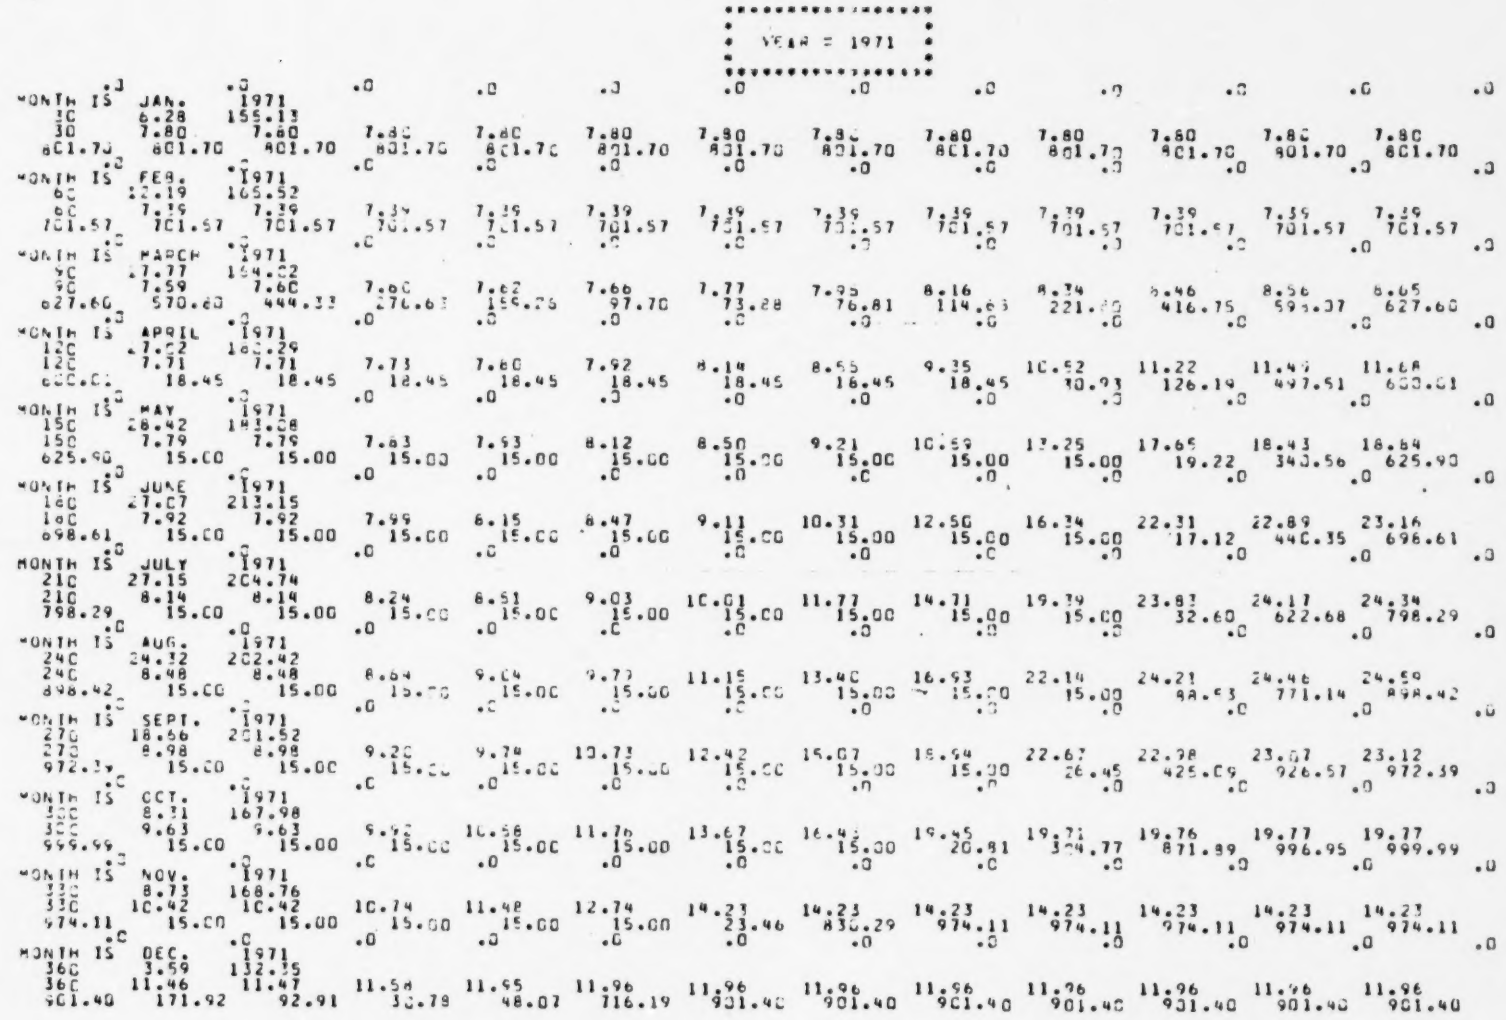

Figure 5. Sample output - Lake Keowee, 1971

Reproduced from best available copy.

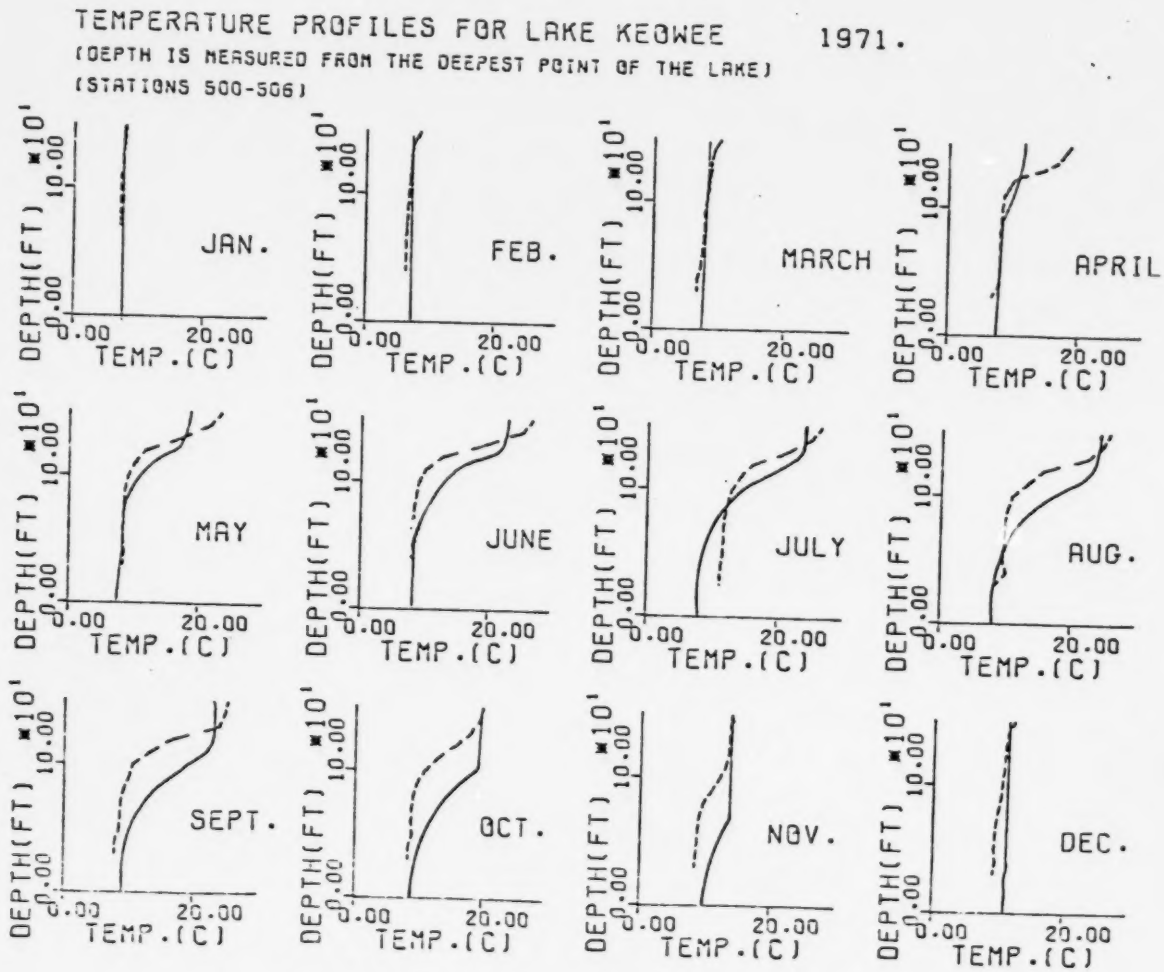

Figure 6. Sample plots - measured average temperature profiles(Stations 500-506) vs predicted temperature profiles, Lake Keowee, 1971

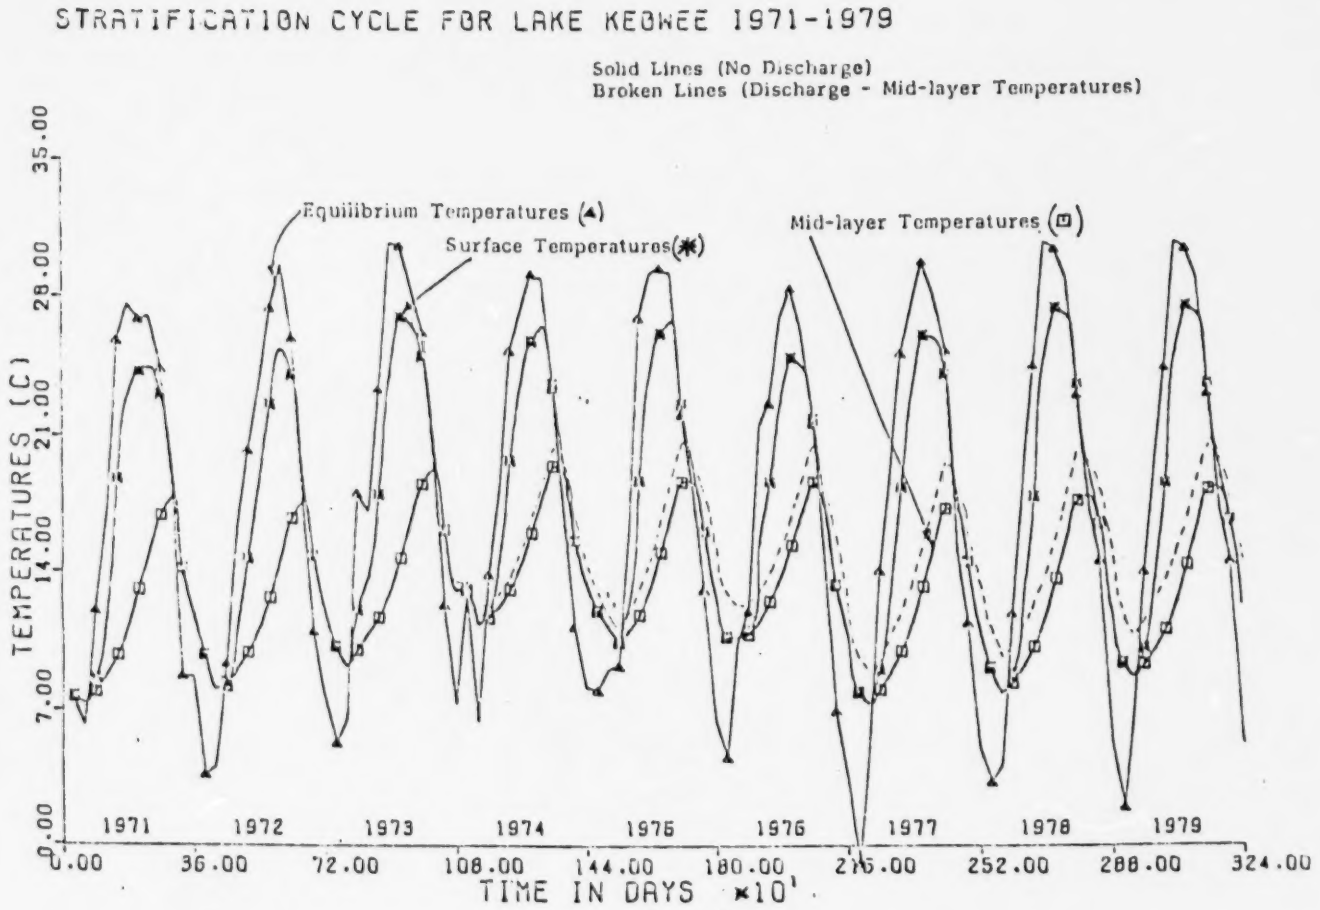

Figure 7. Sample plot

APPENDIX B

FORTRAN PROGRAM LISTING

```
      NASA SYM CREATED ON 12 AUG 80 AT 14:17:05
 1    C      ONE DIMENSIONAL MODEL FOR THE SEASONAL THERMOCLINE
 2    C
 3    C
 4           DIMENSION T(20),AV(20),CB(20),Z(20),A(20),XKZ(20),ROW(20),TN(20)
 5           DIMENSION DM(20),T2(20),XTDD(10,360)
 6           DIMENSION DELTEM(12),QP(12)
 7           CHARACTER*6 MONTHS(12)
 8    C
 9    C
10           DATA(MONTHS(J),J=1,12)/'JAN.','FEB.','MARCH','APRIL','MAY','JUNE',
11          C'JULY','AUG.','SEPT.','OCT.','NOV.','DEC.'/
12    C
13    C
14    C      IF YOU NEED TO STORE RESULTS ON MAGNETIC TAPE READ JRUN=1
15    C      OTHERWISE JRUN=2.
16    C
17           READ 1,JRUN
18           READ 1,IYEAR,DZ,XKZL,H,G
19           READ 1,PI,A1,A2,A3,A4
20           READ 1,A5,A6,TO,CP,SIGMA
21           READ 1,R6,R7,R8,R9,R10
22    1      FORMAT()
23           MM1=0
24             Z(1)=0.
25           JIM=1
26           TDD=0.
27           DVE=0.
28           CALL AREAS(A)
29           J=1
30           JW=1
31           JJ=0
32           NDAYS=0
33           NDAYS1=0
34             TIME=0.
35           TIME1=0.
36           TIME2=0.
37           TIME3=0.
38             TIME4=0.
39             TE=TO
40             DO 20 I=1,12
41             T(I)=TO
42               T2(I)=TO
43       20        CONTINUE
44                DO 22 I=2,11
45                Z(I)=DZ/2.+(I-2)*DZ
```

```
      22       CONTINUE
               Z(12)=H
               DT=(0.4*DZ**2)/1000.0
               QP2=574.07383*(60.**2)*24.
               CALL YEARS(SELTEM,QQPP,IYEAR)
               CALL CCW(QP,DELTEM,IYEAR,DT)
                N=0
                OMEGA=2.*PI/360.
                T(12)=T0
                T12=T0
               JTOT=1
               MJ=1
               ROW(12)=(A4+A5*T(12)+A6*(T(12))**2)*62.4
               ROWCP=ROW(12)*CP
               CALL EQUIL1(IN,TE,AK,TDEW,WIND,HSOL)
      33       IF(MJ.EQ.1)DELTM2=DM(1)-T(7)
               FRVEL=(R6+R7*SIN(OMEGA*TIME+R8))**2
               XKZ0=(R9+R10*SIN(OMEGA*TIME+R8))
                AV(1)=A1+A2*(T(1)-4.)+A3*(T(1)-4.)**2
                XKZ(1)=XKZ0*(1+SIGMA*AV(1)*G*((H-Z(1))**2)*
              1(3.*T(1)+T(3)-4.*T(2))/(2.*DZ*FRVEL))**(N-1)
                DO 90 I=2,11
                AV(I)=A1+A2*(T(I)-4.)+A3*(T(I)-4.)**2
                XKZ(I)=XKZ0*(1+SIGMA*AV(I)*G*((H-Z(I))**2)*
              1(T(I+1)-T(I-1))/(DZ*FRVEL))**(N-1)
                 ROW(I)=(A4+A5*T(I)+A6*(T(I))**2)*62.4
       90        CONTINUE
               ROW(12)=(A4+A5*T(12)+A6*(T(12))**2)*62.4
               AV(12)=A1+A2*(T(12)-4.)+A3*(T(12)-4.)**2
               XKZ(12)=XKZ0*(1+SIGMA*AV(12)*G*((H-Z(12))**2)*
              1    (3.*T(11)+T(9)-4.*T(10))/(1.5*DZ*FRVEL))**(N-1)
               ROWCP=ROW(12)*CP
               CALL SMOOTH(XKZ,XKZU,XKZL,NDAYS1,TM12,T12,T,DT1,DZ)
      902      DO 989 I=1,12
               IF(XKZ(I).LT.XKZL)XKZ(I)=XKZL
               IF(XKZ(I).GT.XKZ0)XKZ(I)=XKZ0
      989      CONTINUE
               DO 91 I=2,11
               F1=DT/(ROW(I)*CP*A(I))
               F2=((ROW(I)+ROW(I+1))/2.*(A(I)+A(I+1))/2.
              1*(XKZ(I)+XKZ(I+1))/2.*(T(I+1)-T(I))-((ROW(I)
              2+ROW(I-1))*(A(I)+A(I+1))/4.*(XKZ(I)
              3+XKZ(I-1))/2.*(T(I)-T(I-1))))/(DZ**2)
               IF(IYEAR.LE.1973)DELTM2=0.0
               IF(IYEAR.LE.1973)QP2=0.0
      777      F3=ROW(I)*DELTEM(JW)*CP*QP(JW)
               F31=ROW(I)*DELTM2*CP*QP2/A(I)
               F41=(ROW(I)*CP*QP2/(1.5*DZ))*DELTM2*(T(I+1)-T(I-1))
               F4=(ROW(I)*CP*QP(JW)/(1.5*DZ))*DELTEM(JW)*(T(I+1)-T(I-1))
               IF(T(I+1).LE.T(I-1))F4=(ROW(I)*CP*QP(JW)/(1.5*DZ))*DELTEM(JW)
```

```
      IF(T(I+1).LE.T(I-1))F41=(ROW(I)*CP*QP2/(1.5*DZ))*DELTM2
      F5=T(I)
      F6=0.5*(EXP(-0.75*(H-Z(I))))*(HSOL)
      F7=-0.75*A(I)
      F8=-F6*F7
      TD=T(8)+DELTEM(JW)
      IF(I.LT.8)XAK=0.
      IF(I.GE.8)XAK=1.
       IF(T(1).GT.TD)XM=0.
       IF(T(1).LE.TD)XM=1.
      TD2=DELTM2+T(5)
      IF(T(1).GT.TD2)XM1=0.
      IF(T(1).LE.TD2)XM1=1.
      IF(I.LE.5)XTK=1.
      IF(I.GT.5)XTK=1.
       TN(I)=(F2+F3+XAK*XM*F4+XM1*F41+F31*XTK+F8)*F1+F5
91     CONTINUE
      TN(1)=T(2)
      TM=(TN(12)+TDEW)/2.0
      F=9.2+0.46*(WIND**2)
      BETA=0.35+0.015*TM+0.0012*(TM**2)
      XK=(4.5+0.05*TN(12)+BETA*F+0.47*F)*4.232*(5./5.)
      TE=TDE+HSOL/XK
       CONS1=(1.5*XK*DZ)/(ROW*CP*XKZ(12))
      TE11=TN(11)
      TE10=TN(10)
      SHEAT=(ROW*CP*DELTEM(JW)*QP(JW))/(A(12)*XK)
       IF(TD.GT.TN(12))GO TO 14
       GO TO 15
14     TN(12)=(4.*TN(11)-TN(10)+CONS1*TE+SHEAT*CONS1)/(3.+CONS1)
       GO TO 16
15     TN(12)=(4.*TN(11)-TN(10)+CONS1*TE)/(3.+CONS1)
16    TS=TN(12)
      CALL MIXIT(TN,A)
      TIME=TIME+DT
      TIME2=TIME2+DT
      TIME3=TIME3+DT
      TIME4=TIME4+DT
      TIME5=TIME5+DT
      DO 929 I=1,12
      T2(I)=TN(I)
929   CONTINUE
      T12=T(12)
600   TN12=TN(12)
601    DO 92 I=1,12
       T(I)=TN(I)
92     CONTINUE
       J=J+1
       TIME1=TIME1+DT
       IF(N.DAYS.GE.360)TIME3=TIME3-360.0
```

```
146                IF(NDAYS.GE.360)TIME2=TIME2-360.0
147                IF(NDAYS.GE.360)TIME=TIME-360.0
148                IF(NDAYS.GE.360)TIME4=TIME4-360.0
149                IF(NDAYS.GE.360)TIME5=TIME5-360.0
150                IF(NDAYS.GE.360)JJ=0
151                IF(NDAYS.GE.360)JW=1
152                IF(IYEAR.GT.1979)GO TO 99
153                IF(NDAYS.GE.360)IYEAR=IYEAR+1
154                IF(NDAYS.GE.360)CALL CCW(QP,DELTEM,IYEAR,DT)
155                IF(NDAYS.GE.360)CALL YEARS(SELTEM,QQPP,IYEAR)
156                IF(NDAYS.GE.360)JTOT=JTOT+1
157                IF(NDAYS.GE.360)JIM=JIM+1
158                IF(TIME4.GE.1.0)GO TO 501
159              GO TO 502
160       501    MMI=MMI+1
161              XTDD(JIM,MMI)=TD
162              TIME4=TIME4-1.
163       502    CONTINUE
164              IF(NDAYS.GE.360)NDAYS=0
165              DO 66 I=2,10
166              CB(I)=(T(I+1)-T(I))/15.
167       66     CONTINUE
168              CB(1)=(T(2)-T(1))/7.5
169              CB(11)=(T(12)-T(11))/7.5
170              IF(TIME1.GE.30.) GO TO 98
171              TDD=TDD+TD
172              DVE=DVE+1.
173              GO TO 33
174       98     NDAYS=TIME2
175              TDD=TDD/DVE
176              PRINT 988,(QP(JWJ),JWJ=1,12)
177       988    FORMAT(1X,12F10.1)
178              TIME4=0.
179              MM1=0
180              JJ=JJ+1
181              JW=JW+1
182              NDAYS1=TIME3
183              MJ=MJ+1
184              DELTM2=DM(MJ)-T(5)
185              IF(MJ.GE.12)MJ=1
186       313    CONTINUE
187              DO 700 I=1,12
188       700    T(I)=TN(I)
189              IF(JRUN.EQ.2)GO TO 111
190              CALL STORE(T,AV,CB,Z,A,XKZ,ROW,TN,DM,T2,MONTHS,T2,QP,
191            CQP,SIGMA,R3,R4,R5,R6,R7,R8,R9,R10,QP2,FREVEL,ROWCP,DT,
192            CXKZO,TE,NDAYS,TN12,T12,F1,F2,F3,F31,F41,F5,F6,F7,F8,TD,TD2,
193            CNDAYS1,TIME,TIME2,TIME3,IYEAR,MJ,XK,TDD,J)
```

```
  111   CONTINUE
        CALL EQUIL1(TN,TE,XK,TDEW,WIND,HSOL)
        PRINT 920,MONTHS(JJ),IYEAR
  920   FORMAT(2X,'MONTH IS',2X,A6,2X,I4)
        PRINT 101,NDAYS,TE,XK
  101   FORMAT(1X,I6,2F9.2)
        WRITE(6,9) NDAYS,(T(I),I=1,12)
        WRITE(6,7) XKZO,(XKZ(I),I=1,12)
        IF((IYEAR.EQ.1973.AND.NDAYS.GE.210).OR.(IYEAR.GT.1973))
       CWRITE(6,18)TDD,DELTEM(JW-1)
   18   FORMAT(1X,'THE AVERAGE MONTHLY DISCH. TEMP. = ',F5.2,5X,
       C'DELTA-T = ',F5.2)
   12   FORMAT(1X,11F10.2)
    9   FORMAT(1X,I6,12F9.2)
    7   FORMAT(1X,13F9.2)
        TIME1=TIME1-30.0
        TDD=0.
        DVE=0.
        IF(IYEAR.GT.1979)GO TO 99
         GO TO 33
   99   PRINT 921,J
  921   FORMAT(2X,'TOTAL NUMBER OF COMPUTATIONS =',I15,' X 12')
        END FILE 8
        STOP
         END
```

```
      APEAS SYM CREATED ON 12 AUG 80 AT 13:05:27
1     C     THIS SUBROUTINE CONTAINS THE AREAS OF
2     C     A DOMAIN (LAKE KEOWEE), AT TWELVE
3     C     HORIZONTAL CROSS-SECTIONS.
4     C
5     C
6           SUBROUTINE AREAS(A)
7           DIMENSION A(20)
8           ACONS=10.**8
9           A(1)=0.0325*ACONS
10          A(2)=0.055*ACONS
11          A(3)=0.200*ACONS
12          A(4)=0.550*ACONS
13          A(5)=1.125*ACONS
14          A(6)=1.8*ACONS
15          A(7)=2.575*ACONS
16          A(8)=3.55*ACONS
17          A(9)=4.70*ACONS
18          A(10)=5.825*ACONS
19          A(11)=7.25*ACONS
20          A(12)=8.006*ACONS
21          RETURN
22          END
```

```
      CCW SYM CREATED ON 12 AUG 80 AT 13:00:09
 1    C     THIS SUBROUTINE CONTAINS THE CONDENSER
 2    C     COOLING WATER. ASSUMES THAT COMPUTATIONS
 3    C     START IN 1971.
 4    C
 5    C
 6    C
 7          SUBROUTINE CCW(QP,DELTEM,IYEAR,DT)
 8          DIMENSION QP(12),DELTEM(12)
 9          IF(IYEAR.GT.1979)GO TO 11
10          IYEA=IYEAR-1970
11          ACOST=10.0
12          GO TO(1,1,3,4,5,6,7,8,9),IYEA
13    1     DO 10 I=1,12
14          QP(I)=0.0
15    10    DELTEM(I)=0.0
16          GO TO 11
17    3     DO 12 I=1,6
18          QP(I)=0.0
19    12    DELTEM(I)=0.0
20          QP(7)=1890.2*ACOST
21          QP(8)=1910.3*ACOST
22          QP(9)=2170.7*ACOST
23          QP(10)=2232.5*ACOST
24          QP(11)=2170.7*ACOST
25          QP(12)=3284.6*ACOST
26          DELTEM(7)=5.3
27          DELTEM(8)=4.6
28          DELTEM(9)=5.3
29          DELTEM(10)=7.3
30          DELTEM(11)=7.7
31          DELTEM(12)=4.1
32          GO TO 11
33    4     QP(1)=3069.3*ACOST
34          QP(2)=3069.4*ACOST
35          QP(3)=2976.9*ACOST
36          QP(4)=2807.3*ACOST
37          QP(5)=2164.6*ACOST
38          QP(6)=4171.8*ACOST
39          QP(7)=5334.6*ACOST
40          QP(8)=4727.1*ACOST
41          QP(9)=5961.4*ACOST
42          QP(10)=4953.4*ACOST
43          QP(11)=4202.1*ACOST
44          QP(12)=5225.6*ACOST
45          DELTEM(1)=4.2
46          DELTEM(2)=7.4
47          DELTEM(3)=8.4
48          DELTEM(4)=8.0
49          DELTEM(5)=2.7
50          DELTEM(6)=6.0
51          DELTEM(7)=5.0
52          DELTEM(8)=4.8
53          DELTEM(9)=5.8
54          DELTEM(10)=3.5
55          DELTEM(11)=7.9
56          DELTEM(12)=5.9
57          GO TO 11
58    5     QP(1)=4612.4*ACOST
59          QP(2)=3694.9*ACOST
60          QP(3)=5456.8*ACOST
61          QP(4)=5570.8*ACOST
62          QP(5)=6494.3*ACOST
63          QP(6)=6574.2*ACOST
64          QP(7)=7104.2*ACOST
65          QP(8)=7510.1*ACOST
66          QP(9)=7201.6*ACOST
67          QP(10)=6993.4*ACOST
```

```
      QP(11)=7467.1*ACOST
      QP(12)=6850.9*ACOST
      DELTEM(1)=8.3
      DELTEM(2)=4.8
      DELTEM(3)=8.2
      DELTEM(4)=8.3
      DELTEM(5)=8.8
      DELTEM(6)=8.8
      DELTEM(7)=8.3
      DELTEM(8)=7.8
      DELTEM(9)=7.4
      DELTEM(10)=7.7
      DELTEM(11)=8.5
      DELTEM(12)=9.4
      GO TO 11
    6 QP(1)=6069.3*ACOST
      QP(2)=4440.2*ACOST
      QP(3)=4874.3*ACOST
      QP(4)=4272.1*ACOST
      QP(5)=3970.7*ACOST
      QP(6)=5197.6*ACOST
      QP(7)=5830.0*ACOST
      QP(8)=7248.3*ACOST
      QP(9)=6785.4*ACOST
      QP(10)=5637.8*ACOST
      QP(11)=5809.2*ACOST
      QP(12)=4914.8*ACOST
      DELTEM(1)=10.6
      DELTEM(2)=7.3
      DELTEM(3)=7.1
      DELTEM(4)=8.1
      DELTEM(5)=5.8
      DELTEM(6)=9.3
      DELTEM(7)=7.4
      DELTEM(8)=8.5
      DELTEM(9)=8.0
      DELTEM(10)=7.8
      DELTEM(11)=6.7
      DELTEM(12)=8.4
      GO TO 11
    7 QP(1)=5045.8*ACOST
      QP(2)=4985.2*ACOST
      QP(3)=5113.5*ACOST
      QP(4)=6013.6*ACOST
      QP(5)=6302.4*ACOST
      QP(6)=4385.3*ACOST
      QP(7)=5038.6*ACOST
      QP(8)=5708.9*ACOST
      QP(9)=6964.0*ACOST
      QP(10)=6754.7*ACOST
      QP(11)=4697.6*ACOST
      QP(12)=5854.6*ACOST
      DELTEM(1)=12.5
      DELTEM(2)=11.4
      DELTEM(3)=10.4
      DELTEM(4)=11.4
      DELTEM(5)=9.4
      DELTEM(6)=8.4
      DELTEM(7)=7.4
      DELTEM(8)=5.0
      DELTEM(9)=5.0
      DELTEM(10)=3.8
      DELTEM(11)=6.2
      DELTEM(12)=7.9
      GO TO 11
    8 QP(1)=6176.7*ACOST
      QP(2)=6444.6*ACOST
      QP(3)=5195.7*ACOST
      QP(4)=4811.8*ACOST
      QP(5)=4984.2*ACOST
      QP(6)=5659.9*ACOST
      QP(7)=7058.6*ACOST
```

```
140                 QP(8)=7914.9*ACOST
141                 QP(9)=6557.3*ACOST
142                 QP(10)=7407.4*ACOST
143                 QP(11)=6065.1*ACOST
144                 QP(12)=6503.5*ACOST
145                 DELTEM(1)=9.0
146                 DELTEM(2)=11.0
147                 DELTEM(3)=13.2
148                 DELTEM(4)=9.7
149                 DELTEM(5)=10.1
150                 DELTEM(6)=8.1
151                 DELTEM(7)=7.9
152                 DELTEM(8)=7.5
153                 DELTEM(9)=7.6
154                 DELTEM(10)=6.2
155                 DELTEM(11)=8.4
156                 DELTEM(12)=7.2
157                 GO TO 11
158           9     QP(1)=7207.7*ACOST
159                 QP(2)=7319.9*ACOST
160                 QP(3)=7419.5*ACOST
161                 QP(4)=7275.8*ACOST
162                 QP(5)=4189.1*ACOST
163                 QP(6)=5381.2*ACOST
164                 QP(7)=4733.3*ACOST
165                 QP(8)=4733.3*ACOST
166                 QP(9)=4733.3*ACOST
167                 QP(10)=4733.3*ACOST
168                 QP(11)=4733.3*ACOST
169                 QP(12)=4733.3*ACOST
170                 DELTEM(1)=10.3
171                 DELTEM(2)=10.4
172                 DELTEM(3)=9.6
173                 DELTEM(4)=9.9
174                 DELTEM(5)=8.2
175                 DELTEM(6)=7.1
176                 DELTEM(7)=5.0
177                 DELTEM(8)=5.0
178                 DELTEM(9)=5.0
179                 DELTEM(10)=5.0
180                 DELTEM(11)=5.0
181                 DELTEM(12)=5.0
182          11     RETURN
183                 END
```

```
EQJIL1 SYM CREATED ON 11 JUN 80 AT 11:00:00
      SUBROUTINE EQUIL1(TN,TE,XK,TDEW,XTN,XTE,XXK,WIND,HSOL)
      DIMENSION TN(20),XTN(20)
2     READ(5,1)TDEW,WIND,HSOL
1     FORMAT()
      WIND=WIND*0.45
      HSOL=HSOL*3.6855
      TM=(TN(12)+TDEW)/2.0
      FW=9.2+0.46*(WIND**2)
      BETA=0.35+0.015*TM+0.0012*(TM**2)
      XK=4.5+0.05*TN(12)+BETA*FW+0.47*FW
      XK=XK*4.232*(9./5.)
      TE=TDEW+HSOL/XK
      XTM=(XTN(12)+TDEW)/2.0
      XFW=9.2+0.46*(WIND**2)
      XBETA=0.35+0.015*XTM+0.0012*(XTM**2)
      XXK=4.5+0.05*XTN(12)+XBETA*XFW+0.47*XFW
      XXK=XXK*4.232*(9./5.)
      XTE=TDEW+HSOL/XXK
      RETURN
      END
```

```
INPJT SYM CREATED ON 12 AJG 80 AT 13:01:13
  1     3.0,6.69,167.0
  2     0.,9.3,264.4
  3     6.3,9.28,264.4
  4     7.5,8.72,457.
  5     17.2,7.5,480.5
  6     18.8,5.65,478.
  7     20.,6.48,409.
  8     19.44,5.75,428.2
  9     18.33,5.77,329.
 10     13.88,7.02,261.3
 11     2.88,7.53,247.7
 12     5.5,8.3,147.7
 13     1.67,6,69,178.
 14     -2.22,9.26,257.6
 15     1.11,9.20,352.5
 16     6.67,8.72,448.
 17     11.11,7.53,433.6
 18     13.13,7.95,564.3
 19     18.77,6.64,493.8
 20     22.22,6.07,453.5
 21     18.8,5.47,386.3
 22     11.5,7.17,298.1
 23     5.9,7.13,220.9
 24     4.,6.8,148.
 25     1.,7.22,162.7
 26     -1.,7.3,279.5
 27     10.,7.1,348.5
 28     7.7,8.44,449.3
 29     14.3,6.83,449.5
 30     20.25,3.04,507.7
 31     22.2,5.32,496.9
 32     21.7,5.1,391.6
 33     20.8,6.803,338.4
 34     13.5,7.1,341.7
 35     7.2,8.14,247.6
 36     3.2,8.6,154.
 37     8.2,5.8,191.4
 38     0.,5.8,226.9
 39     6.3,7.7,326.1
 40     10.7,8.73,397.7
 41     17.2,6.8,436.
 42     17.8,6.98,559.3
 43     21.,5.2,459.5
 44     21.,5.87,480.
 45     17.5,6.74,339.2
 46     10.2,5.7,302.5
 47     6.0,7.2,231.1
 48     3.8,6.9,181.9
 49     3.0,6.393,191.4
 50     3.5,7.614,226.9
 51     2.2,9.6,326.1
 52     7.2,7.6,397.7
 53     17.5,4.8,436.
 54     19.0,5.82,559.3
 55     21.3,5.10,459.5
 56     21.0,5.4,480.8
 57     16.2,7.3,339.3
 58     12.4,7.7,302.5
 59     7.9,6.9,231.1
 60     2.0,7.2,181.9
 61     -1.0,7.4,209.8
 62     3.2,8.5,310.9
 63     3.9,7.9,338.6
 64     11.2,7.6,496.9
 65     14.0,7.3,448.4
 66     18.3,6.4,460.2
 67     19.8,5.9,488.3
 68     18.0,6.65,480.4
 69     15.4,7.13,345.1
```

```
70        8.2,7.21,287.5
71        1.0,7.27,237.5
72        -1.5,8.2,195.0
73        -6.6,8.04,205.5
74        -2.78,8.4,317.6
75        6.0,7.7,328.5
76        10.2,7.6,427.3
77        15.4,6.2,473.
78        18.,6.7,543.3
79        20.2,5.8,551.8
80        20.7,5.4,423.9
81        18.7,5.3,350.7
82        9.2,7.2,286.6
83        7.0,7.5,196.2
84        0.4,7.2,178.2
85        -2.8,7.9,227.
86        -5.0,6.8,308.
87        1.2,7.6,408.
88        9.6,7.6,429.
89        14.,6.7,513.
90        19.4,4.7,598.
91        20.8,5.7,568.
92        20.8,5.1,461.
93        15.5,5.7,385.
94        9.3,6.6,369.
95        9.0,5.8,232.
96        0.4,7.3,191.
97        -3.33,8.6,208.
98        0.0,7.2,251.
99        5.0,7.9,373.
100       9.2,7.6,479.
101       14.,6.7,513.
102       19.4,4.7,598.
103       20.8,5.7,568.
104       20.8,5.1,461.
105       15.5,5.7,387.
106       9.3,6.6,369.
107       9.0,5.8,232.
108       0.4,7.3,191.
109       0.4,7.3,191.
```

```
      MIXIT SYM CREATED ON 12 AUG 80 AT 13:26:57
 1    C
 2    C
 3    C     THIS SUBROUTINE MIXES STABILIZES UNSTABLE
 4    C     TEMPERATURE PROFILES.
 5    C
 6    C
 7          SUBROUTINE MIXIT(TN,A)
 8          DIMENSION TN(20),A(20)
 9    100   DO 10 I=1,11
10          IF(TN(I+1).GE.TN(I))GO TO 1
11          IF((TN(I)-TN(I+1)).LT.0.0)GO TO 1
12          TAV=(TN(I+1)+TN(I))/2.
13          TN(I+1)=TAV
14          TN(I)=TAV
15    1     CONTINUE
16    10    CONTINUE
17          TMAX=AMAX1(TN(1),TN(2),TN(3),TN(4),TN(5)
18         C,TN(6),TN(7),TN(8),TN
19         C(9),TN(10),TN(11),TN(12))
20          IF(TN(12).LT.TMAX)GO TO 100
21    300   RETURN
22          END
```

```
      PLOTTER SYM CREATED ON 12 AUG 80 AT 12:56:46
 1          PARAMETER N=14,NN=12,NTIME=12,ND=110
 2          DIMENSION IBUF(1000)
 3          DIMENSION TEMP(50),DEEP(50),TEMPS(ND),DEEPS(ND),QP(NN),TZ(NN)
 4          DIMENSION T(N),AV(N),CB(N),Z(N),XKZ(N),TEQ(ND),THF(ND),TSU(ND)
 5          DIMENSION ROW(N),TN(N),DM(N),T2(N),A(N),ZED(ND)
 6          DIMENSION E1(50),E2(50),E3(50),E4(50),E6(50),E5(50),
 7         CE7(50),ED(50)
 8          CHARACTER*6 MONTHS(N)
 9          CHARACTER*6 IBCD
10          M=1
11          L=0
12    C
13    C
14    C     READ JRUN=1 IF YOU DESIRE PLOTS FOR MEASURED DATA
15    C     READ JRUN=2 IF YOU DO NOT.
16    C     NOTE : IF PLOTS FOR SEVEN STATIONS ARE NOT
17    C              AVAILABLE, LINES 35 TO 46 MUST BE MODIFIED
18          READ 100,JRUN,JYEAR
19    100   FORMAT()
20          ICOUNT=0
21          XZD=0.
22    5     JO=0
23          CALL PLOTS(IBUF,1000,11)
24          CALL PLOT(0.0,7.0,-3)
25          DO 1 I=1,NTIME
26          CALL READER(T,AV,CB,Z,A,XKZ,ROW,TN,DM,TZ,MONTHS,T2,QP,
27         CCP,SIGMA,R3,R4,R5,R6,R7,R8,R9,R10,QP2,FREVEL,ROWCP,DI,
28         CXKZO,TL,NDAYS,TN12,T12,F1,F2,F3,F31,F41,F5,F6,F7,F8,TD,TD2,
29         CNDAYS1,TIME,TIME2,TIME3,IYEAR,MJ,XK,TDD,J)
30          ICOUNT=ICOUNT+1
31          IF(ICOUNT.GT.96)GO TO 333
32          IF(JRUN.EQ.2)GO TO 200
33          READ(5,8)(DEEP(INK),TEMP(INK),INK=1,NSTOP)
34          DO 15 KL=1,50
35          READ(5,8) DEEP(KL),E1(KL),E2(KL),E3(KL),E4(KL),E5(KL),
36         CE6(KL),E7(KL)
37          READ(5,6)AE1,BE1,CE1,DE1,EE1,FE1,GE1,HE1,QE1
38          DEEP(KL)=AE1
39          E1(KL)=BE1
40          E2(KL)=CE1
41          E3(KL)=DE1
42          E4(KL)=EE1
43          E5(KL)=FE1
44          E6(KL)=GE1
45          E7(KL)=HE1
```

```
46                ED(KL)=0E1
47                IF(E3(KL).EQ.0.0)GO TO 16
48                IF(DEEP(KL).EQ.(-1.))GO TO 16
49                TEMP(KL)=(E1(KL)+E2(KL)+E3(KL)+E4(KL)+E5(KL)+E6(KL)+
50               CE7(KL))/ED(KL)
51                TEMP(KL)=E3(KL)
52          15    CONTINUE
53          200   CONTINUE
54          16    NSTOP=KL-1
55                IF(JRUN.EQ.2)GO TO 201
56                DO 222 JIJ=1,50
57                IF(DEEP(KL).EQ.(-1.))GO TO 223
58                READ(5,8)AE1,BE1,CE1,DE1,EE1,FE1,GE1,HE1,0E1
59                IF(AE1.EQ.(-1))GO TO 223
60          222   CONTINUE
61          223   CONTINUE
62          201   CONTINUE
63                CONS2=1./0.3048
64                IF(JRUN.EQ.2)GO TO 202
65                DO 9   INK=1,NSTOP
66                DEEP(INK)=CONS2*DEEP(INK)
67           9      DEEP(INK)=150.-DEEP(INK)
68                DEEP(NSTOP+1)=0.0
69                DEEP(NSTOP+2)=Z(NN)/1.5
70                TEMP(NSTOP+1)=0.0
71                TEMP(NSTOP+2)=30.0/1.5
72          202   CONTINUE
73          8     FORMAT()
74          333   JO=JO+1
75                L=L+1
76                TSJ(L)=T(12)
77                XZD=XZD+30.
78                ZED(L)=XZD
79                TEMPS(L)=TEMP(1)
80                TEQ(L)=TE
81                THF(L)=(T(7)+T(8))/2.
82                IBCD=MONTHS(JO)
83                Z(NN+1)=0.0
84                Z(NN+2)=Z(NN)/1.5
85                T(NN+1)=0.0
86                T(NN+2)=30./1.5
87                CALL AXIS(0.0,0.0,6HTEMP.(C),-8,1.5,0.0,T(13),T(14))
88                CALL AXIS(0.0,0.0,9HDEPTH(FT),9,1.5,90.0,Z(13),Z(14))
89                CALL FLINE(T,Z,-NN,1,0,0)
90                IF(ICOUNT.GT.96)GO TO 444
91                IF(JRUN.EQ.2)GO TO 203
92                CALL DASHL(TEMP,DEEP,NSTOP,1)
93          203   CONTINUE
94          444   CALL SYMBOL(1.0,0.5,0.14,IBCD,0.0,6)
95                CALL PLOT(2.25,0.0,-3)
```

42

```
      IF(JO.EQ.4.OR.JO.EQ.8)GO TO 3
      GO TO 1
3     CALL PLOT(-9.0,-2.25,-3)
1     CONTINUE
      CALL PLOT(-2.25,0.0,-3)
      CALL SYMBOL(-6.75,6.75,.14,41HTEMPERATURE PROFILES FOR LAKE KEOWEE
     C     ,0.0,41)
      P1=JYEAR
      MY=JYEAR
      CALL NUMBER(999.,999.,0.14,P1,0.0,0)
      CALL SYMBOL(-6.75,6.5,0.1,54H(DEPTH IS MEASURED FROM THE DEEPEST P
     COINT OF THE LAKE),0.0,54)
      CALL PLOT(6.0,-9.25,-3)
      PRINT 2,MY
2     FORMAT(1X,'THE PLOTS FOR',I5,' ARE COMPLETE')
      IF(M.EQ.9)GO TO 6
      M=M+1
      JYEAR=JYEAR+1
      GO TO 5
6     CALL PLOT(6.0,0.0,-3)
      DO 13 I=1,96
13    DEEPS(I)=ZED(I)
      DEEPS(97)=0.0
      DEEPS(98)=3240.0/9.0
      TSU(109)=0.0
      TSU(110)=35./5.
      TEQ(109)=0.0
      TEQ(110)=35./5.
      THF(109)=0.0
      THF(110)=35./5.
      TEMPS(97)=0.0
      TEMPS(98)=35./5.
      ZED(109)=0.0
      ZED(110)=3240./9.
      CALL PLOT(0.0,2.0,-3)
      CALL AXIS(0.0,0.0,12HTIME IN DAYS,-12,9.0,0.0,ZED(109),ZED(110))
      CALL AXIS(0.0,0.0,16HTEMPERATURES (C),16,5.0,90.,TSU(109),TSU
     C(110))
      CALL FLINE(ZED,TSU,-108,1,2,11)
      CALL FLINE(ZED,TEQ,108,1,2,2)
      CALL FLINE(ZED,THF,-108,1,2,0)
      IF(JRUN.EQ.2)GO TO 204
      CALL DASHL(DEEPS,TEMPS,96,1)
204   CONTINUE
```

```
      C
      C
      C
      C     CHANGE TITLES TO SUIT NEEDS (4 LINES)
      C
      C
            CALL SYMBOL(0.0,6.0,0.14,
           C46HSTRATIFICATION CYCLE FOR LAKE KEOWEE 1971-1979,0.0,46)
            CALL SYMBOL(0.0,0.10,0.10,87H   1971        1972        1973        1974
           C       1975        1976        1977        1978        1979,0.0,87)
            WRITE(6,7)
      7     FORMAT(1X,'ALL PLOTS ARE NOW COMPLETE',//,' NORMAL JOB  EXIT')
            CALL PLOT(15.0,0.0,-3)
            STOP
            END
```

```
READER SYM CREATED ON 12 AUG 80 AT 13:21:45
      C
      C
      C     THIS SUBROUTINE READS THE MAGNETIC TAPE
      C     CONTAINING THE COMPUTED RESULTS.
      C
      C
            SUBROUTINE READER(T,AV,CB,Z,A,XKZ,ROW,TN,DM,TZ,MONTHS,T2,QP,
           CCP,SIGMA,R3,R4,R5,R6,R7,R8,R9,R10,QP2,FREVEL,ROWCP,DT,
           CXKZO,TE,NDAYS,TN12,T12,F1,F2,F3,F31,F41,F5,F6,F7,F8,TD,TD2,
           CNDAYS1,TIME,TIME2,TIME3,IYEAR,MJ,XK,TDD,J,NCASE,SF,EDEPT,VOL)
            DIMENSION T(20),AV(20),CB(20),Z(20),A(20),XKZ(20),
           CROW(20),TN(20),DM(20),TZ(20),T2(20),QP(12)
            CHARACTER*6 MONTHS(12)
      1     CONTINUE
            READ (6,END=1) (T(IJ),IJ=1,12),(AV(IJ),IJ=1,12),
           C(CB(IJ),IJ=1,12),(Z(IJ),IJ=1,12),(A(IJ),IJ=1,12),
           C(XKZ(IJ),IJ=1,12),(ROW(IJ),IJ=1,12),(TN(IJ),IJ=1,12),
           C(DM(IJ),IJ=1,12),(TZ(IJ),IJ=1,12),(MONTHS(IJ),IJ=1,12),
           C(T2(IJ),IJ=1,12),
           C(QP(IJ),IJ=1,12),
           CCP,SIGMA,R3,R4,R5,R6,R7,R8,R9,R10,QP2,FREVEL,ROWCP,DT,
           CXKZO,TE,NDAYS,TN12,T12,F1,F2,F3,F31,F41,F5,F6,F7,F8,TD,TD2,
           CNDAYS1,TIME,TIME2,TIME3,IYEAR,MJ,XK,TDD,J,NCASE,SF,EDEPT,VOL
            RETURN
            END
```

```
SMOOTH SYM CREATED ON 12 AUG 80 AT 14:34:30
C
C       THIS SUBROUTINE CORRECTS THE EDDY DIFFUSIVITY
C       IF VARIABLE TIME STEP IS REQUIRED, 'DT1' SHOULD
C       BE CHANGED TO 'DT' IN THE CALLING PROGRAM.
C
        SUBROUTINE SMOOTH(XKZ,XKZU,XKZL,NDAYS1,TN12,T12,T,DT1,DZ)
        DIMENSION XKZ(20),T(20)
        DO 93 I=1,12
        IF(XKZ(I).GT.XKZU) XKZ(I)=XKZU
        IF(XKZ(I).LT.XKZL) XKZ(I)=XKZL
 93     CONTINUE
        NEW=0
        DO 96 I=2,12
        IF(XKZ(I).EQ.XKZL)NEW=I
 96     CONTINUE
        IF(NEW.EQ.0)GO TO 77
        DO 55 I=1,NEW
        XKZ(I)=XKZL
 55     CONTINUE
 77     CONTINUE
        IF(NDAYS1.LE.60.OR.NDAYS1.GT.300) GO TO 29
        IF(TN12.GE.T12) GO TO 19
        IF(TN12.LT.T12) GO TO 39
 19     XMIN=AMIN1(XKZ(1),XKZ(2),XKZ(3),XKZ(4),XKZ(5),XKZ(6),XKZ(7),XKZ
       1(8),XKZ(9),XKZ(10),XKZ(11),XKZ(12))
        DO 82 I=1,12
        IF(XKZ(I).EQ.XMIN) GO TO 81
 82     CONTINUE
        GO TO 29
 81     IMIN=I
        DO 70 I=1,IMIN
        XKZ(I)=XKZ(IMIN)
 70     CONTINUE
        GO TO 29
 39     XMAX=AMAX1(XKZ(1),XKZ(2),XKZ(3),XKZ(4),XKZ(5),XKZ(6),XKZ(7),XKZ
       1(8),XKZ(9),XKZ(10),XKZ(11),XKZ(12))
        DO 62 I=1,12
          IF(XKZ(I).EQ.XMAX) GO TO 61
 62     CONTINUE
        GO TO 29
 61     IMAX=I
        DO 50 I=IMAX,12
        XKZ(I)=XKZ(IMAX)
 50     CONTINUE
 29     CONTINUE
200     XMAX=AMAX1(XKZ(1),XKZ(2),XKZ(3),XKZ(4),XKZ(5),XKZ(6),XKZ(7),XKZ
       1(8),XKZ(9),XKZ(10),XKZ(11),XKZ(12))
        DT1=(0.4*DZ**2)/XMAX
        RETURN
        END
```

```
STORE SYM CREATED ON 12 AUG 80 AT 13:19:47
      C
      C
      C     THIS SUBROUTINE STORES THE COMPUTED RESULTS ON
      C     MAGNETIC TAPE.
      C
      C
      C
            SUBROUTINE STORE(T,AV,CB,Z,A,XKZ,ROW,TN,DM,TZ,MONTHS,T2,QP,
           CCP,SIGMA,R3,R4,R5,R6,R7,R8,R9,R10,CP2,FREVEL,ROWCP,DT,
           CXKZO,TE,NDAYS,TN12,T12,F1,F2,F3,F31,F41,F5,F6,F7,F8,TD,TD2,
           CNDAYS1,TIME,TIME2,TIME3,IYEAR,MJ,XK,TDD,J,NCASE,SF,EDEPT,VOL)
            DIMENSION T(20),AV(20),CB(20),Z(20),A(20),XKZ(20),
           CROW(20),TN(20),DM(20),TZ(20),T2(20),
           CQP(12)
            CHARACTER*6 MONTHS(12)
            WRITE (8) (T(IJ),IJ=1,12),(AV(IJ),IJ=1,12),
           C(CB(IJ),IJ=1,12),(Z(IJ),IJ=1,12),(A(IJ),IJ=1,12),
           C(XKZ(IJ),IJ=1,12),(ROW(IJ),IJ=1,12),(TN(IJ),IJ=1,12),
           C(DM(IJ),IJ=1,12),(TZ(IJ),IJ=1,12),(MONTHS(IJ),IJ=1,12),
           C(T2(IJ),IJ=1,12),
           C(QP(IJ),IJ=1,12),
           CCP,SIGMA,R3,R4,R5,R6,R7,R8,R9,R10,CP2,FREVEL,ROWCP,DT,
           CXKZO,TE,NDAYS,TN12,T12,F1,F2,F3,F31,F41,F5,F6,F7,F8,TD,TD2,
           CNDAYS1,TIME,TIME2,TIME3,IYEAR,MJ,XK,TDD,J,NCASE,SF,EDEPT,VOL
            END FILE 8
            RETURN
            END
```

```
YEARS SYM CREATED ON 12 AUG 80 AT 13:10:03
      C
      C       THIS SUBROUTINE PRINTS THE YEAR TITLE.
      C
      C
            SUBROUTINE YEARS(SELTEM,QQPP,IYEAR)
            PRINT 99,IYEAR
 99         FORMAT(59X,17('*'),/,59X,'*',15X,'*',/,59X,
     C'*',2X,'YEAR =  ',I4,2X,'*',/,59X,'*',15X,'*'
     C,/,59X,17('*'))
            RETURN
            END
```